


Package Dimensions

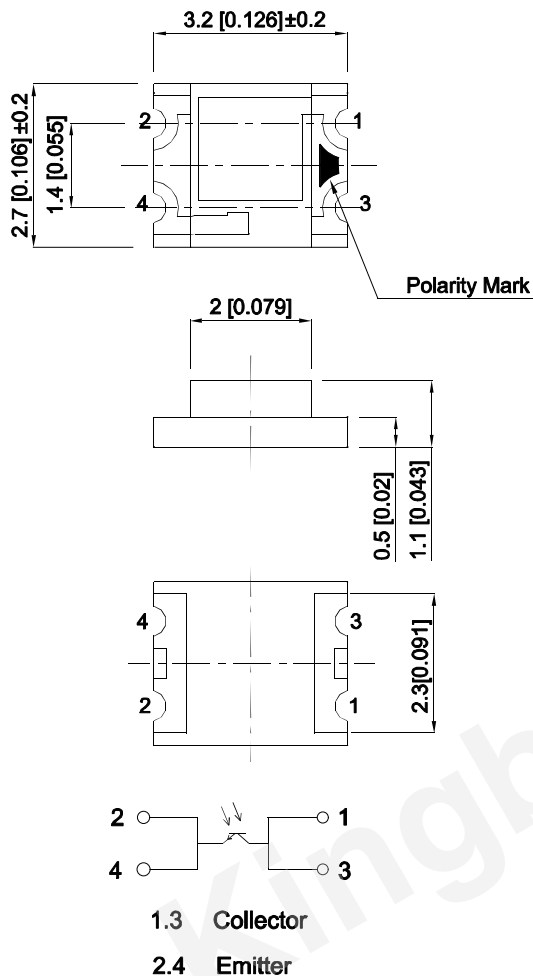

Part Number: KPS-3227SP1C

Description

The KPS-3227SP1C is a NPN silicon phototransistor, It is a good effective solution to the power saving of display backlighting appliances and the device is sensitive to the visible spectrum.

Features

- *Lead-free package.
- *Component in accordance with RoHS.
- *Adapted to human eye responsive.
- *Wide angle of half sensitivity.
- *Moisture sensitivity level : level 3.
- * Package:2000 pcs/ Reel.

Applications

Detection of ambient light to control display backlighting in:

- *Mobile phones
- *PDAs
- *Note books
- *Video cameras

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.1 (0.004") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



*Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit	Notice
Collector Emitter Voltage	V_{ce0}	60	V	$I_{ce0}=100\mu A$
Emitter-Collector Voltage	V_{eco}	4	V	$I_{eco}=100\mu A$
Operating Temperature	T_{opr}	-40 to +85	°C	-
Storage Temperature	T_{stg}	-40 to +85	°C	-

Note:

1. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.

*Electrical and Optical Characteristics (Ta=25°C)

Parameter	Symbol	Value			Unit	Conditions
		Min.	TYP.	Max.		
Collector Emitter Breakdown Voltage	BVceo	60	-	-	V	I _{ceo} =100μA
Emitter Collector Breakdown Voltage	BVeco	4	-	-	V	I _{eco} =100μA
Collector dark current	I _D	-	10	100	nA	V _{CE} =5V E _V =0Lx
Light Current(1)	I _{PH1}	-	6	-	μA	V _{CE} =5V, E _V =100 Lx ^[1]
Light Current(2)	I _{PH2}	-	130	-	μA	V _{CE} =5V, E _V =1000 Lx ^[1]
Light Current(3)	I _{PH3}	-	950	-	μA	V _{CE} =5V, E _V =1000 Lx ^[2]
Light Current(4)	I _{PH4}	-	420	-	μA	V _{CE} =5V, E _V =1000 Lx ^[3]
Saturation Output Voltage	V _O	4.5	4.7	-	V	V _{CC} =5V, E _V =1000Lx ^[1] , R _L =75KΩ
Peak Wavelength	λ _P	-	580	-	nm	-
Response Wavelength	λ	390	-	700	nm	>10% Response
Collector Emitter Saturation Voltage	V _{CE (sat)}	-	-	0.4	V	I _C =10 mA

Notes:

1. White Fluorescent light (Color Temperature = 6200K) is used as light source.
2. Luminance by CIE standard illuminant-A/2856K, incandescent lamp.
3. Sunlight (Color Temperature = 4600K) is used as light source.
4. Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

Fig.1 Illuminance vs. Output Photocurrent



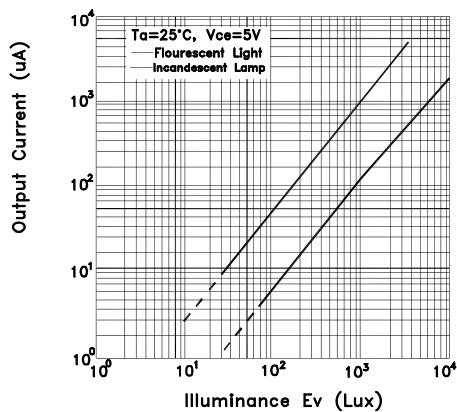


Fig.2 Relative Spectral Responsivity vs. Wavelength

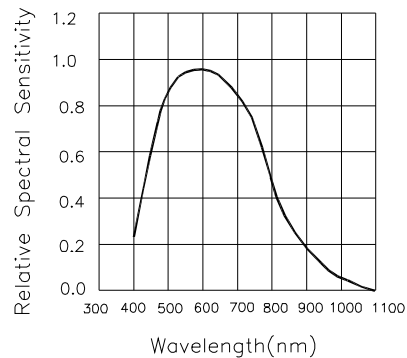

Converting Photocurrent to Voltage

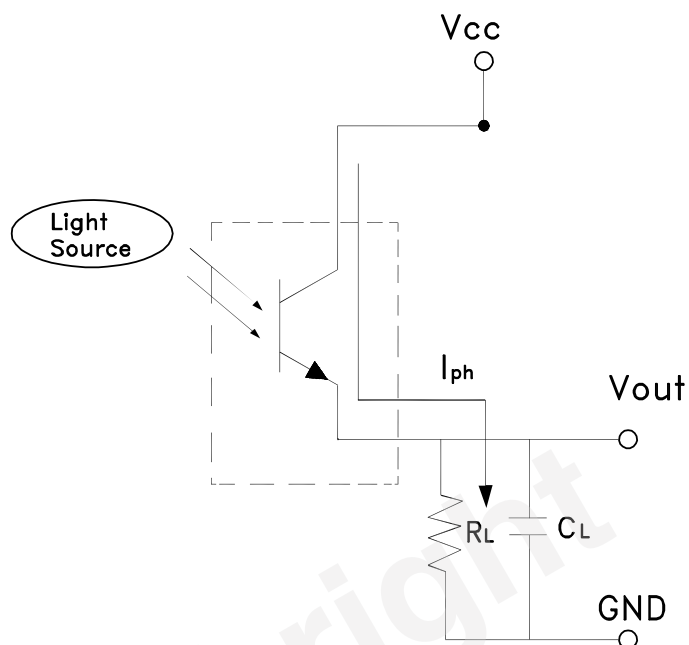


Notes:

1. The output voltage (Vout) is the product of photocurrent (IPH) and loading resistor (RL)
2. A right loading resistor shall be chosen to meet the requirement of maximum ambient light, and output saturation voltage:

$$V_{out(max)} = I_{out(max)} \times R_L \leq V_{out(saturation)} = V_{cc} - 0.3V$$


KPS-3227SP1C

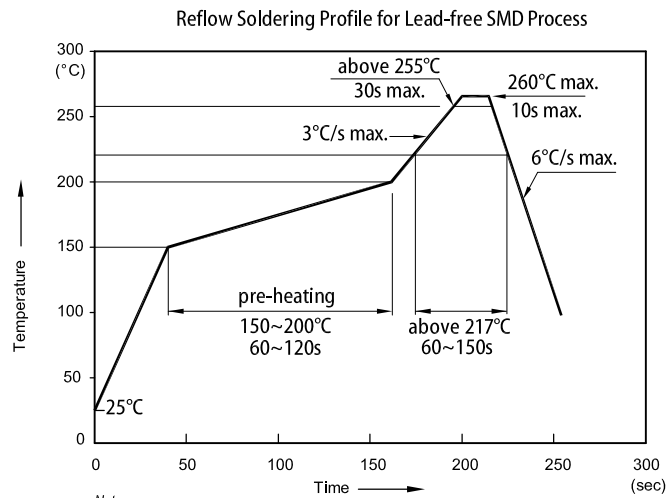


Notes:

1. Don't cause stress to the LEDs while it is exposed to high temperature.
2. The maximum number of reflow soldering passes is 2 times.
3. Reflow soldering is recommended. Other soldering methods are not recommended as they might cause damage to the product.

Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

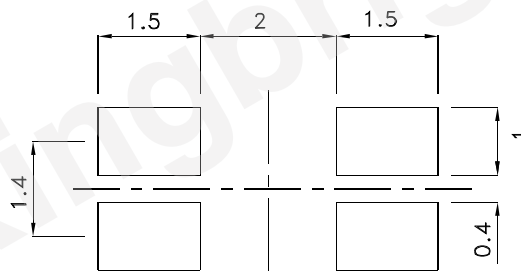


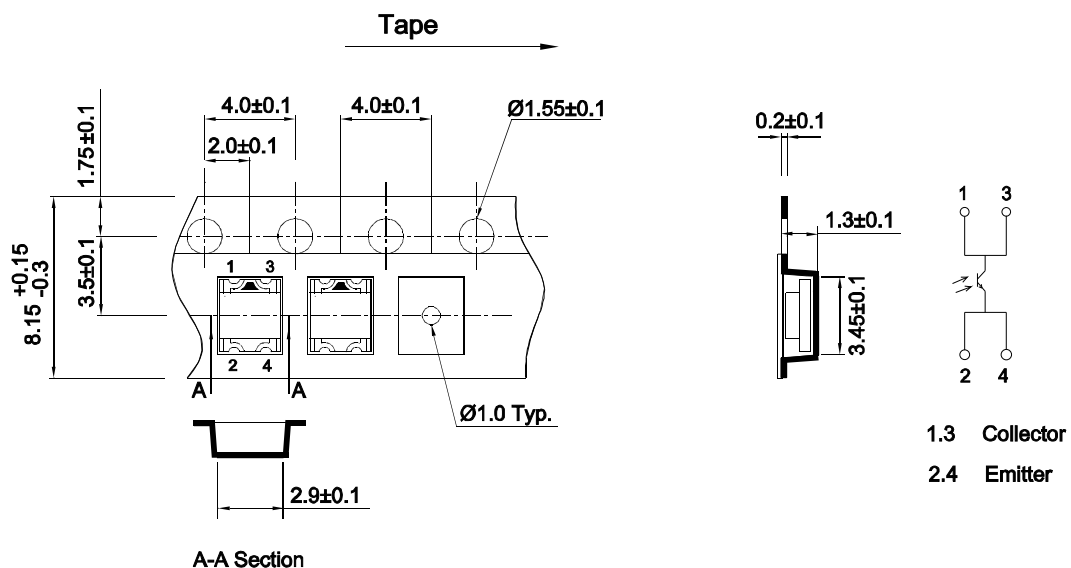

Tape Specifications (Units : mm)



PACKING & LABEL SPECIFICATIONS

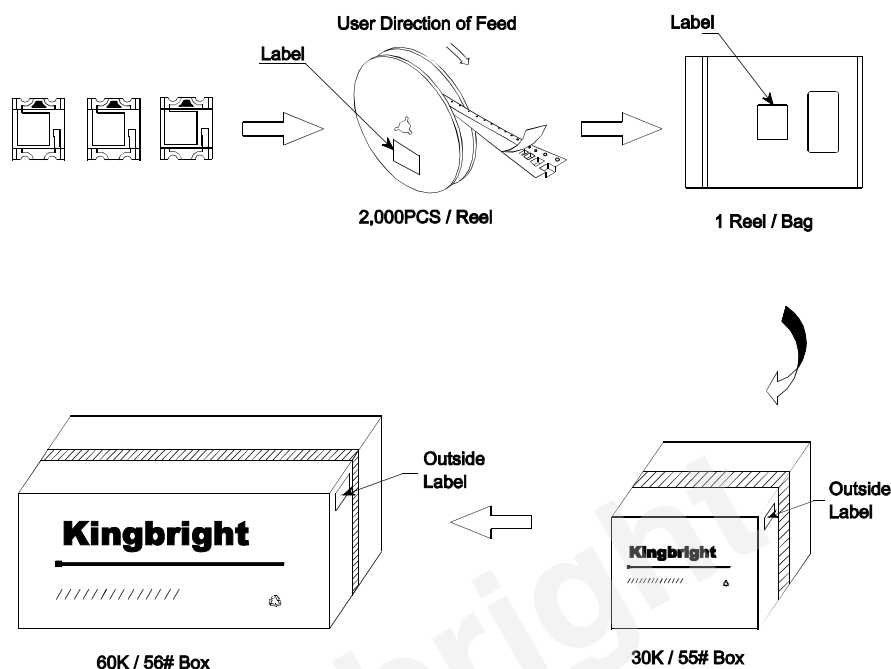KPS-3227SP1C



Kingbright		XXXXXXXXXX-XXXX	
P/NO: XXXXXXXX			
QTY: XXXXpcs			
S/N: XXXX			
CODE: XXX			
COUNTRY: CN		QC DATE: XXX XX XXXX PASSED	
LOT NO:			
			
XXXXXXXXXX-XXXX			
		1	RoHS Compliant

Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
6. All design applications should refer to Kingbright application notes available at http://www.kingbright.com/application_notes