

Part Number: BL0102-14-34

Super Bright Red
Super Bright Green

Features


- High visibility.
- No. of built-in 5mm LED lamps: Super Bright Red 6 pcs,
Super Bright Green 8 pcs.
- Waterproof package with hood suitable for outdoor and indoor
information boards.
- RoHS compliant.

Description


The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

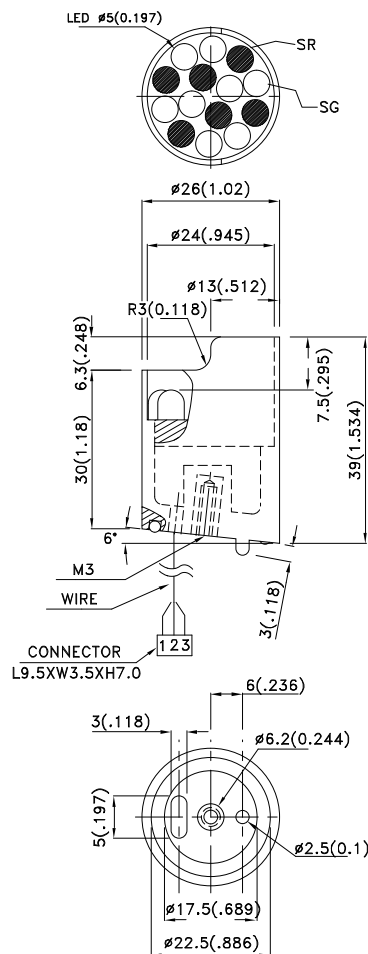

L-1583SRC-11.7X6PCS
L-1583SGC-11.7X8PCS



Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Term	Min	Typ.		Max.	Units	Test Conditions
IV	Luminous Intensity	BL0102-14-34	Super Bright Red	1800	3600		-	mcd	IF=20mA
				*600	*1200				
			Super Bright Green	800	1600		-	mcd	IF=40mA
				*800	*1600				
210/2	Viewing Angle		-	-	40		-	deg	-
VF	Forward Voltage		Super Bright Red	-	13		17.5	V	IF=20mA
			Super Bright Green	-	17.6		20	V	IF=20mA
λP	Peak wavelength		Super Bright Red	-	660	*655	-	nm	IF=20mA
			Super Bright Green	-	565	*565	-		IF=20mA
λD	Dominate Wavelength		Super Bright Red	-	640	*640	-	nm	IF=20mA
			Super Bright Green	-	568	*568	-		IF=20mA
Δλ1/2	Spectral Line Half-width		Super Bright Red	-	20		-	nm	IF=20mA
			Super Bright Green	-	30		-		IF=20mA
IR	Reverse Current		-	-	-		20	uA	VR = 5V

Note:


*Luminous intensity value and Wavelength value are traceable to the CIE127-2007 compliant national standards.


Absolute Maximum Ratings at T_A=25°C

Parameter	Type		Units
	Super Bright Red	Super Bright Green	
Total Power dissipation	450	600	mW
DC Forward Current	30	60	mA
Reverse Voltage	5		V
Operating Temperature	-40 To +70		°C
Storage Temperature	-40 To +85		°C

PACKING & LABEL SPECIFICATIONS

BL0102-14-34

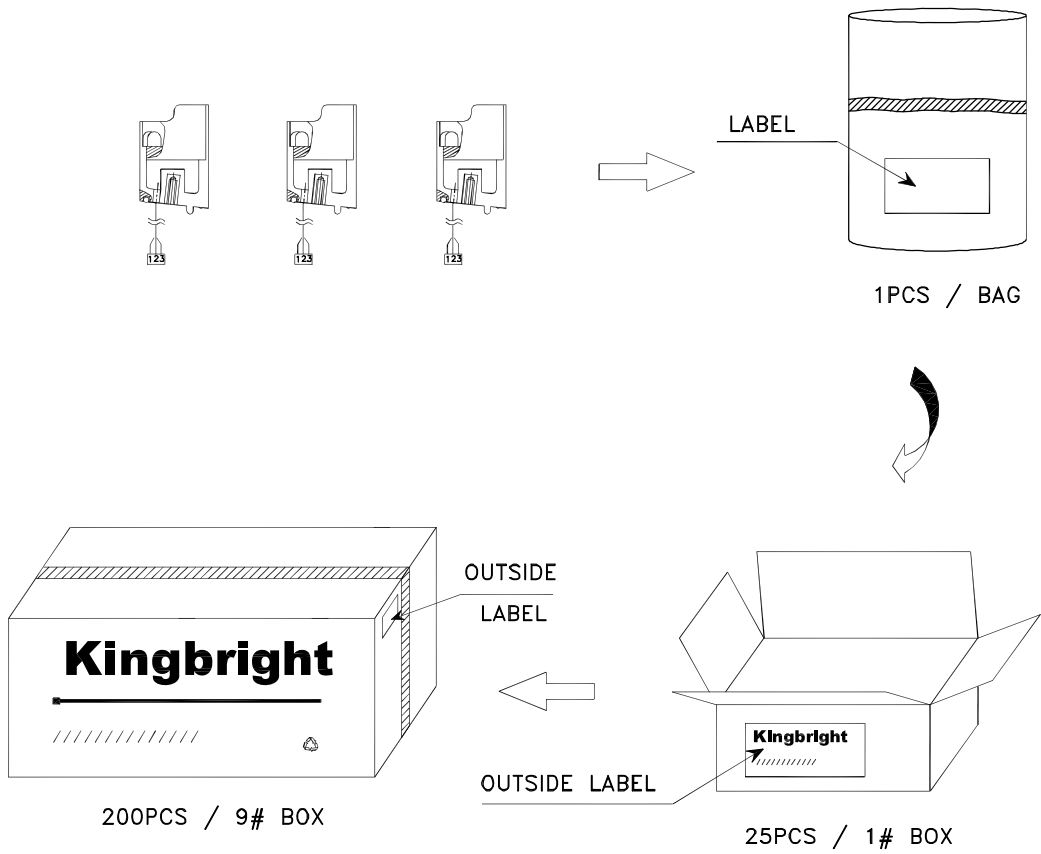

Kingbright		
P/NO: BL0102-14xxx		
QTY: 1pcs	Q.C.	Q C
S/N: XXXX		XX XX XXXX
CODE: XXX		PASSED
LOT NO:		
		
XXXXXXXXXXXXXXXXXXXX		
RoHS Compliant		

Detailed application notes are listed on our website.
http://www.kingbright.com/application_notes