

Part Number: KA-3022CGSK-4.5SF

Green


### Features

- 3.0mm x 2.2mm SMT LED, 1.5mm thickness.
- White reflector to maximize reflection of light.
- Ultra-compact type assures space saving.
- High efficiency & low power consumption.
- Package : 1500pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

### Description

The Green source color devices are made with AlGaInP on GaAs substrate Light Emitting Diode.

### Package Dimensions

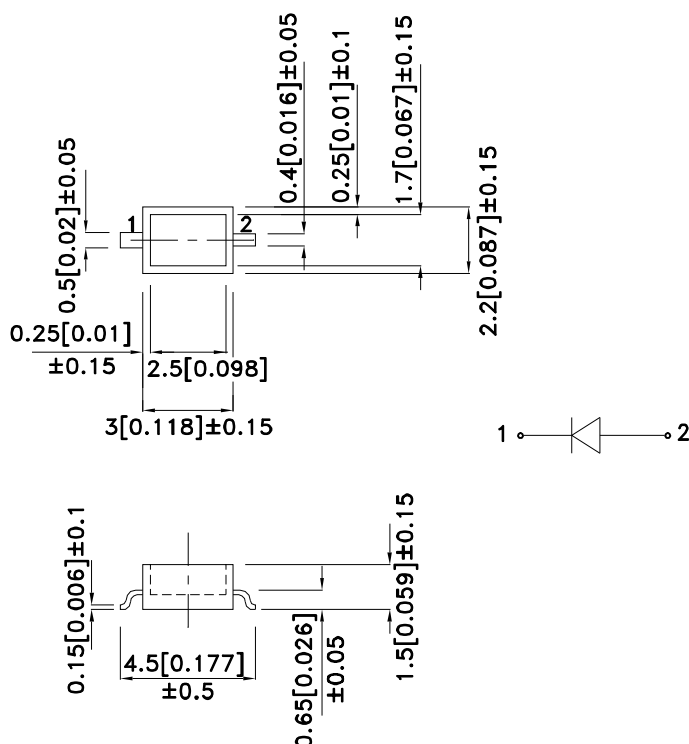

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25(0.01") unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
5. The device has a single mounting surface. The device must be mounted according to the specifications.




## Handling Precautions



Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools.




2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.



3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



- 4.1. The inner diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks.
- 4.2. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 4.3. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



5. As silicone encapsulation is permeable to gases, some corrosive substances such as  $H_2S$  might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.

Detailed application notes are listed on our website.

[http://www.kingbright.com/application\\_notes](http://www.kingbright.com/application_notes)

## Selection Guide

| Part No.          | Dice            | Lens Type   | Iv (mcd) [2]<br>@ 20mA |      | Viewing<br>Angle [1] |
|-------------------|-----------------|-------------|------------------------|------|----------------------|
|                   |                 |             | Min.                   | Typ. | 2θ1/2                |
| KA-3022CGSK-4.5SF | Green (AlGaInP) | Water Clear | 40                     | 80   | 120°                 |

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Luminous intensity/ luminous Flux: +/-15%.
3. Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

## Electrical / Optical Characteristics at TA=25°C

| Symbol | Parameter                | Device | Typ. | Max. | Units | Test Conditions |
|--------|--------------------------|--------|------|------|-------|-----------------|
| λpeak  | Peak Wavelength          | Green  | 574  |      | nm    | IF=20mA         |
| λD [1] | Dominant Wavelength      | Green  | 570  |      | nm    | IF=20mA         |
| Δλ1/2  | Spectral Line Half-width | Green  | 20   |      | nm    | IF=20mA         |
| C      | Capacitance              | Green  | 15   |      | pF    | VF=0V;f=1MHz    |
| VF [2] | Forward Voltage          | Green  | 2.1  | 2.5  | V     | IF=20mA         |
| IR     | Reverse Current          | Green  |      | 10   | uA    | VR=5V           |

Notes:


- 1.Wavelength: +/-1nm.
2. Forward Voltage: +/-0.1V.
3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

## Absolute Maximum Ratings at TA=25°C

| Parameter                | Green          | Units |
|--------------------------|----------------|-------|
| Power dissipation        | 75             | mW    |
| DC Forward Current       | 30             | mA    |
| Peak Forward Current [1] | 150            | mA    |
| Reverse Voltage          | 5              | V     |
| Operating Temperature    | -40°C To +85°C |       |
| Storage Temperature      | -40°C To +85°C |       |






Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

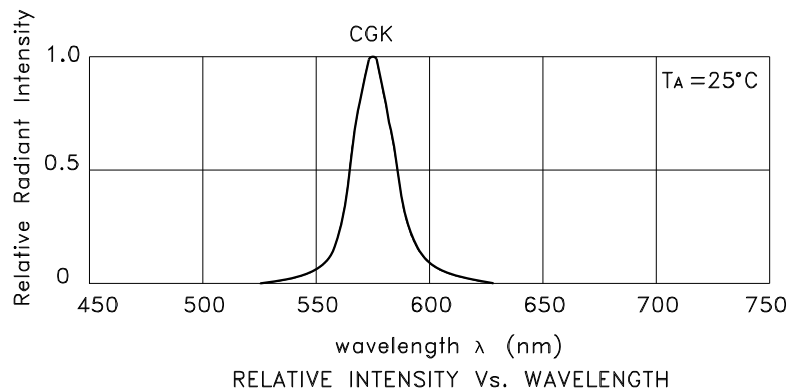

Green


KA-3022CGSK-4.5SF

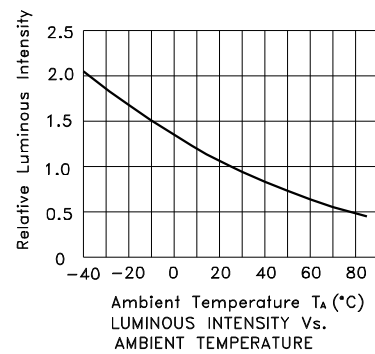




PACKING & LABEL SPECIFICATIONS

KA-3022CGSK-4.5SF

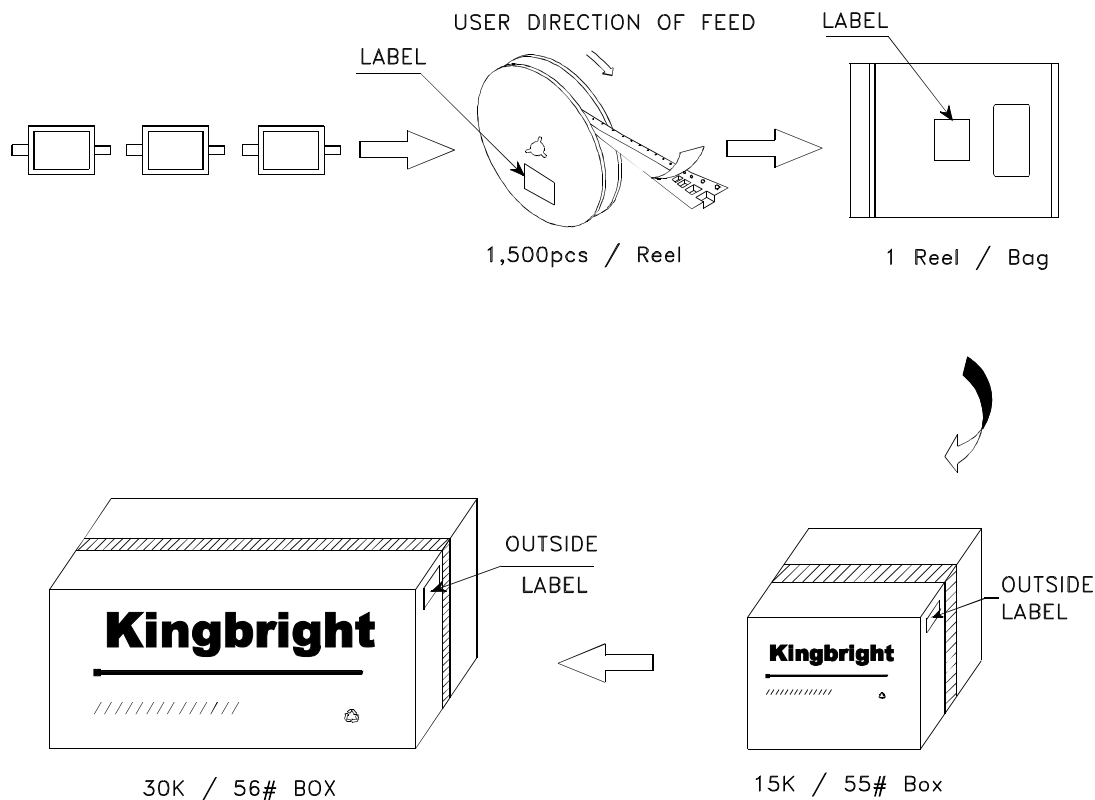

|  |                             |
|--|-----------------------------|
| <b>Kingbright</b>  |                             |
| P/NO: KA-3022xxx   |                             |
| QTY: 1,500 pcs   | Q.C.                        |
| S/N: XXXX  | Q C<br>XX XX XXXX<br>PASSED |
| CODE: XXX  |                             |
| LOT NO:  |                             |
|  |                             |
| XXXXXXXXXXXXXX   |                             |
| RoHS Compliant   |                             |