


SUBMINIATURE , HIGH SENSITIVITY PHOTOINTERRUPTER

*Features

- 1.Compact and thin.
- 2.Visible light cut-off type.
- 3.High sensitivity.
- 4.Side irradiance.
- 5.Package: 3000pcs/Reel.
- 6.Moisture sensitivity level : level 4.
- 7.New PCB Production Process.
- 8.RoHS compliant.

*Applications

Cassette tape recorders,VCRs toys.
Various microcomputerized control equipment.

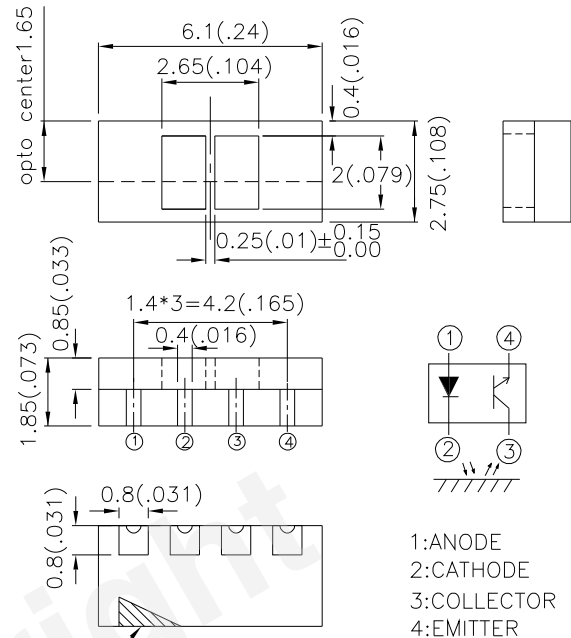

POLARITY MARK

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. The specifications, characteristics and technical data described in the data-sheet are subject to change without prior notice.

*Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit
Input	Forward Current	I_F	30	mA
	Reverse Voltage	V_R	5	V
	Power Dissipation	P_d	37.5	mW
	Peak Forward Current (Pulse Width $\leq 100\mu s$, Duty Cycle=1%)	I_{FP}	1	A
Output	Collector-emitter voltage	V_{CEO}	30	V
	Emitter-Collector voltage	V_{ECO}	5	V
	Collector current	I_c	20	mA
	Collector Power Dissipation	P_c	75	mW
Operating temperature		T_{opr}	-25~+65	°C
Storage temperature		T_{stg}	-25~+65	°C
Soldering temperature (1/16 inch from body for 5 seconds)		T_{sol}	260	°C

Note:

1. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.



Electrical / Optical Characteristics at $T_A=25^{\circ}\text{C}$

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V_F	$I_F=20\text{mA}$	1.0	1.2	1.5	V
	Reverse current	I_R	$V_R=5\text{V}$	—	—	10	μA
	Peak Wavelength	λ_p	$I_F=20\text{mA}$	-	940	-	nm
Output	Collector dark current	I_{CEO}	$V_{CE}=20\text{V}$	—	10^{-9}	10^{-7}	A
Viewing Angle		θ	-	-	90	-	$^{\circ}$
Transfer Characteristics	Collector-emitter saturation voltage	$V_{CE(SAT)}$	$I_C=0.1\text{mA}$, $I_F=20\text{mA}$	—	0.1	0.4	V
	Collector current [1]	I_C	$V_{CE}=5\text{V}$, $I_F=20\text{mA}$	10	—	300	μA
	Leak current [2]	I_{LEAK}	$V_{CE}=5\text{V}$, $I_F=20\text{mA}$	—	—	5	μA
	Response time	Rise time	$V_{CE}=2\text{V}$, $I_C=100\mu\text{A}$, $R_L=1\text{K}\Omega$, $d=3.8\text{mm}$	—	20	—	μs
		Fall time		—	20	—	μs

Notes:

- The condition and arrangement of the reflective object are shown below. Fig.1, Fig.2, Fig.3, Fig.4, Fig.5 and Fig.9 in the same condition.
- Without reflective object.

Test Condition and Arrangement for Collector Current


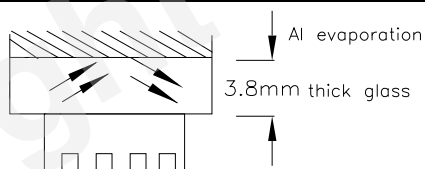


Fig.1 Forward Current Vs. Forward Voltage




Fig.2 Collector Current Vs. Forward Current







Fig.3 Response Time Vs. Load Resistance

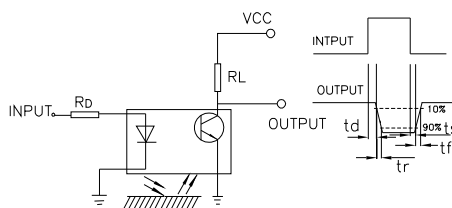

The test circuit for response time

Fig.4 Relative Collector Current Vs. Ambient Temperature



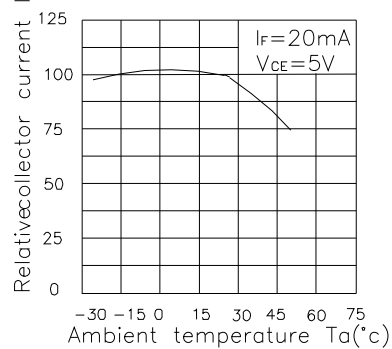



Fig.5 Collector Current Vs. Collector-Emitter Voltage

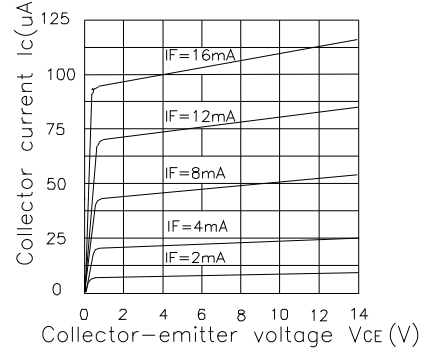

*Fig.6 Relative Collector Current Vs. Distance Between Sensor and Al Evaporation Glass

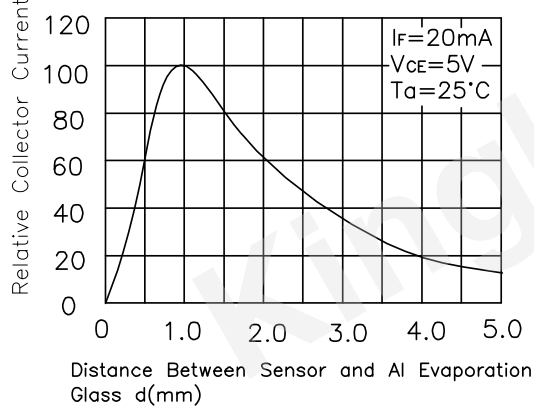

*Fig.7 Relative Collector Current Vs Card Moving Distance (1)

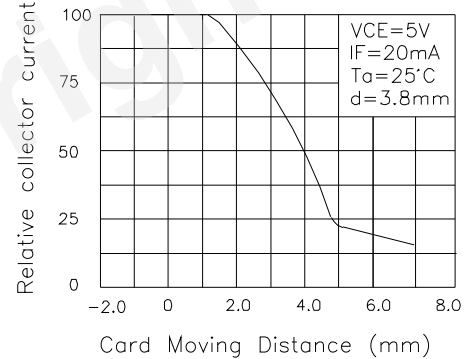

*Fig.8 Relative Collector Current Vs. Card Moving Distance (2)





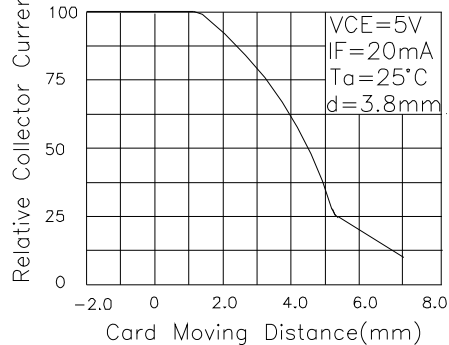



Fig.9 Collector Dark Current Vs. Ambient Temperature

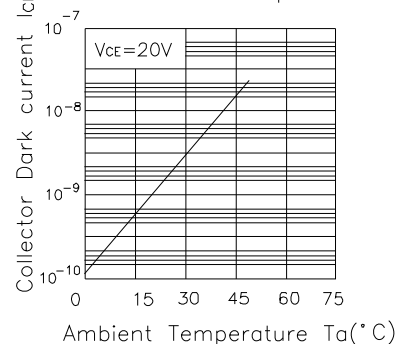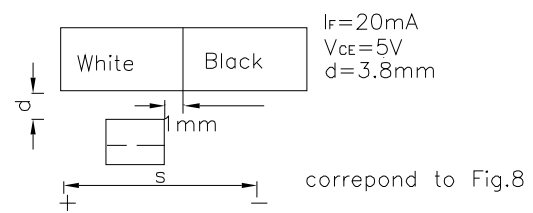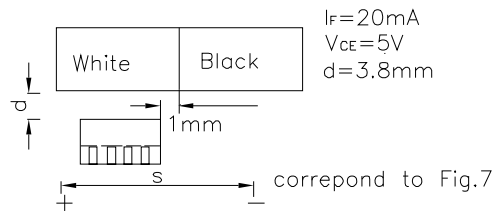


*Note:Test condition for distance

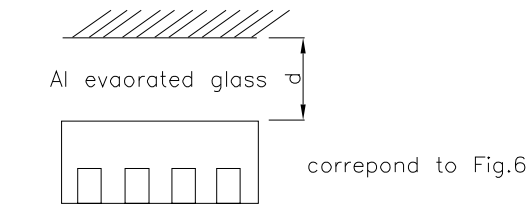


RECOMMENDED SOLDERING PATTERN

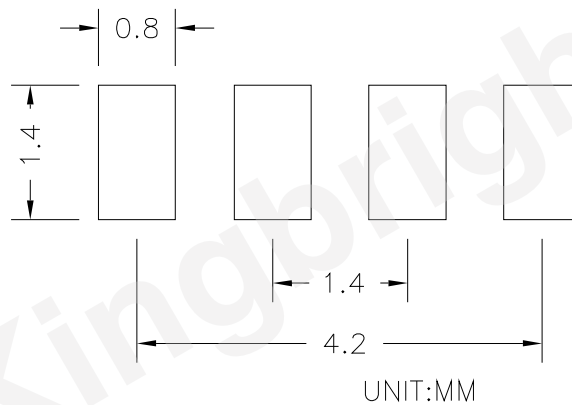

Tape Specifications (Units : mm)

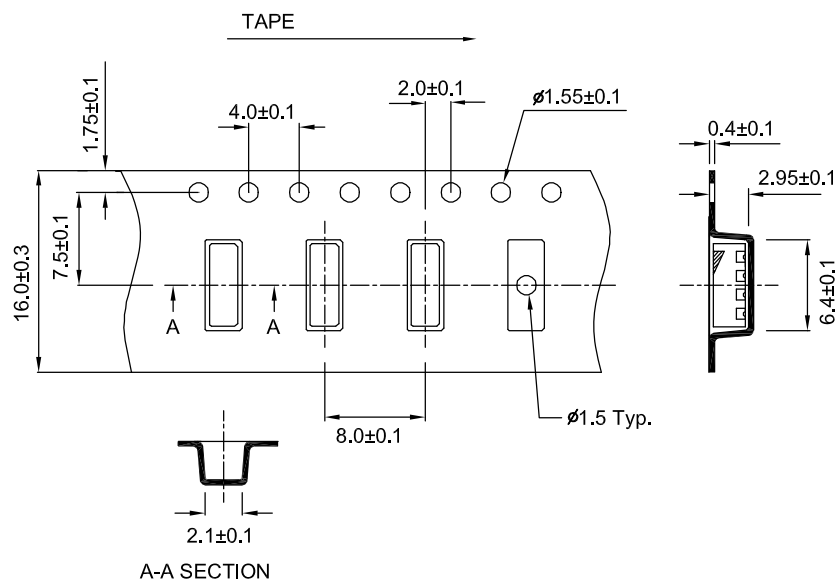

Reflow Soldering Profile For Lead-free SMT Process.

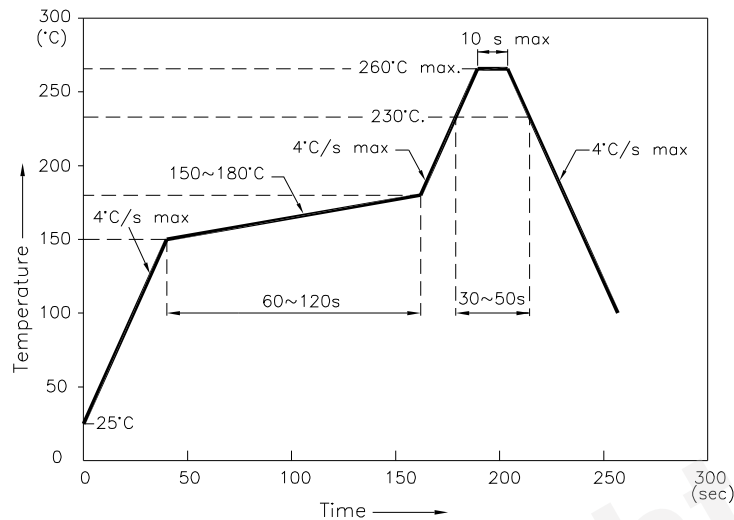


NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

PACKING & LABEL SPECIFICATIONS

KRC011

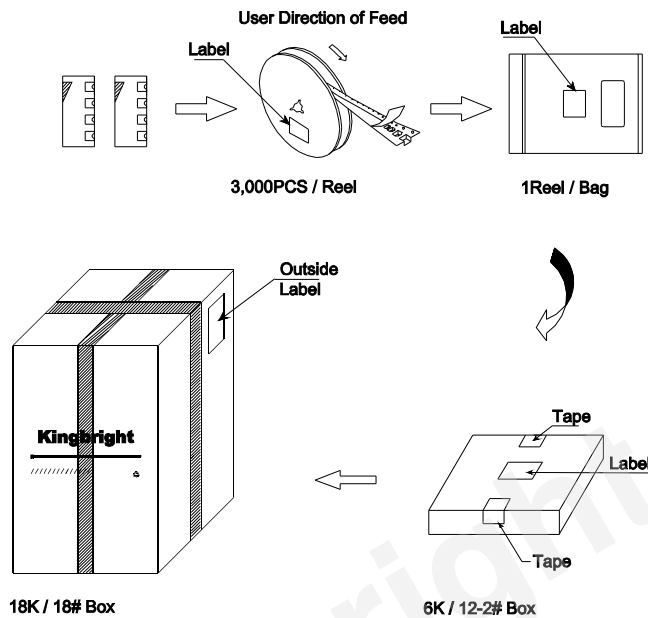

Kingbright		
P/NO: KRCxxx		
QTY: 3,000 PCS	Q.C.	Q C xx xx xxx PASSED
S/N: XXXX		
CODE: XXX		
LOT NO:		
XXXXXXXXXXXXXXXXXXXXXXXXXXXX		
RoHS Compliant		

Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
6. All design applications should refer to Kingbright application notes available at http://www.kingbright.com/application_notes