


Part Number: KL-05

Features

- Designed to replace rectangular right angle through hole device.
- High transmissivity polycarbonate material.
- Housing UL rating:94V-0.
- RoHS compliant.

Package Dimensions

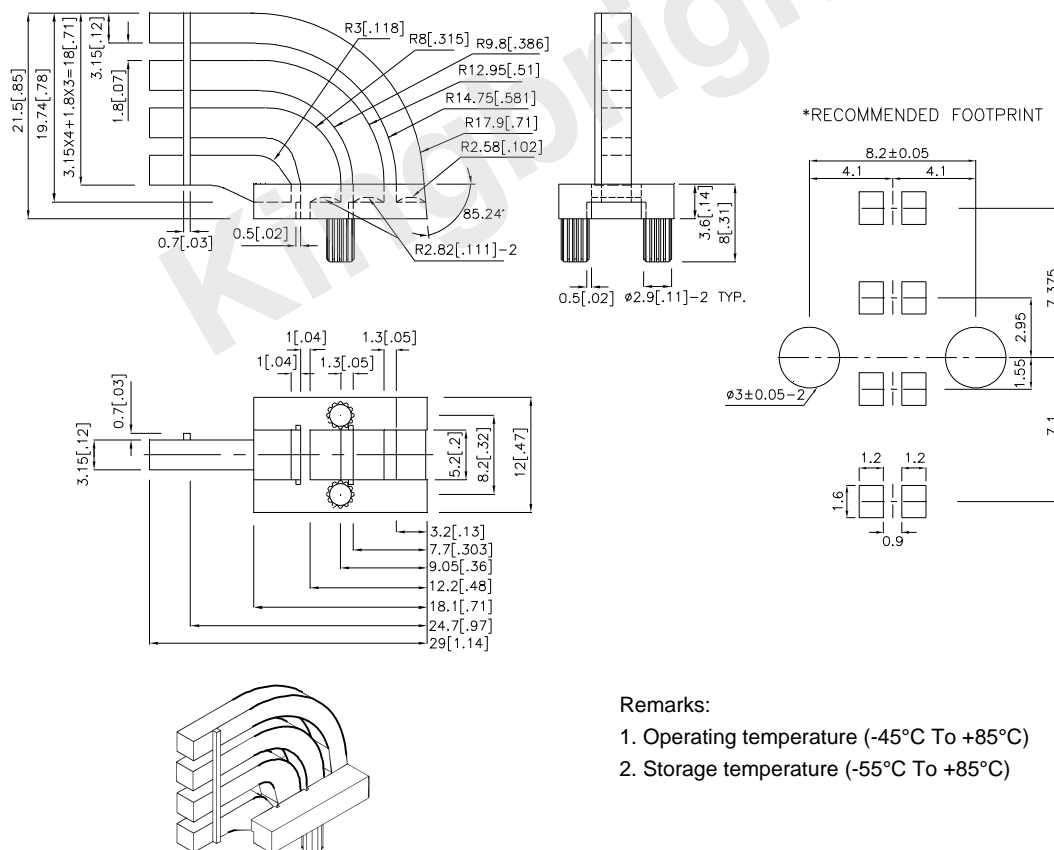

Remarks:

1. Operating temperature (-45°C To +85°C)
2. Storage temperature (-55°C To +85°C)


Notes:


1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25 (0.01")$ unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



PACKING & LABEL SPECIFICATIONS

KL-05

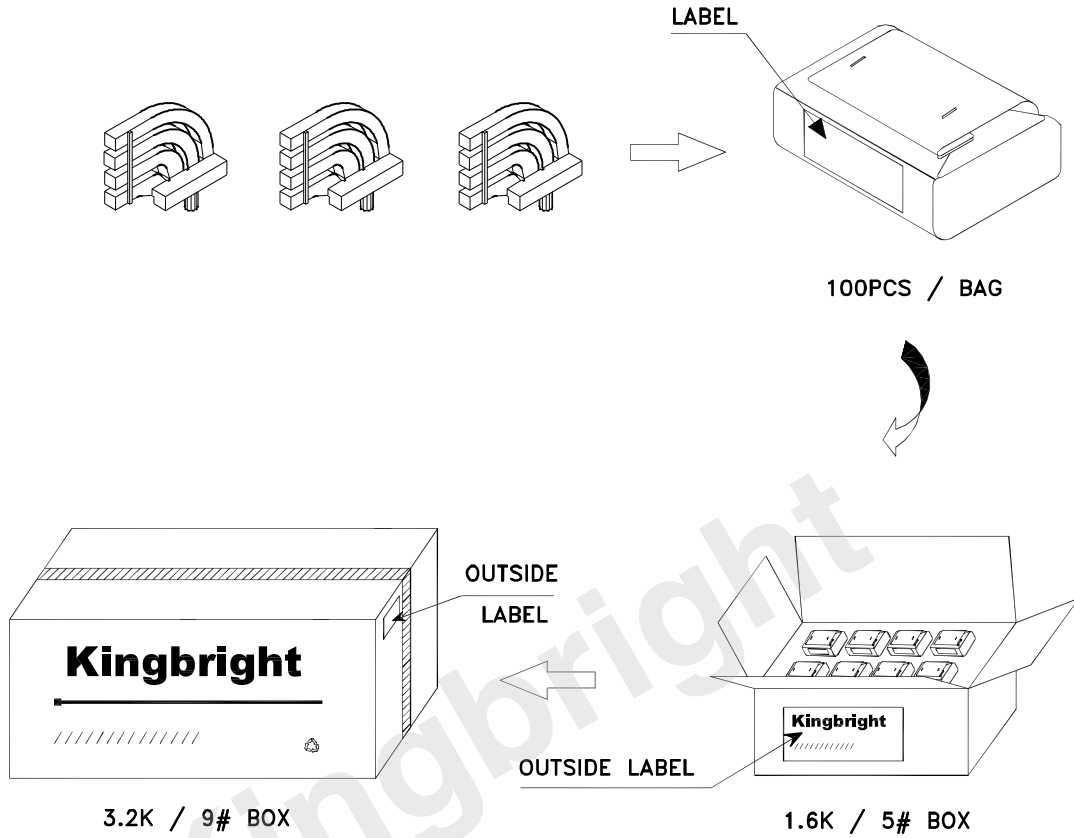

Kingbright		
P/NO: KL-05xxx		
QTY: 100 pcs	Q.C.	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; text-align: center;"> Q C XX XX XXXX PASSED </div>
S/N: XXXX		
CODE: XXX		
LOT NO:		
 xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx		
RoHS Compliant		