



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

Part Number: KPB-3025SURKZGC

Hyper Red
Green

Features

- 3.0mmx2.5mm SMT LED, 1.1mm thickness.
- Bi-color, Low power consumption.
- Wide viewing angle.
- Ideal for backlight and indicator.
- Package : 2000pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

Description

The Hyper Red source color devices are made with Al-GaNp on GaAs substrate Light Emitting Diode.


The Green source color devices are made with InGaN on Sapphire Light Emitting Diode.

Static electricity and surge damage the LEDs.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.


All devices, equipment and machinery must be electrically grounded.

Package Dimensions

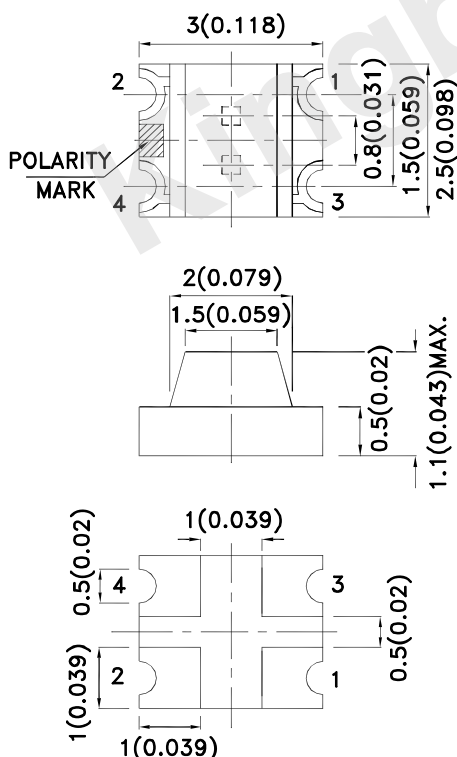

SURK
2 1

ZG
4 3



Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.2(0.008)$ unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.



Selection Guide

| Part No. | Dice | Lens Type | Iv (mcd) [2] @ 20mA | | Viewing Angle [1] |
|-----------------|---------------------|-------------|------------------------|------|----------------------|
| | | | Min. | Typ. | 2θ1/2 |
| KPB-3025SURKZGC | Hyper Red (AlGaInP) | Water Clear | 120 | 250 | 120° |
| | | | *40 | *70 | |
| | Green (InGaN) | | 200 | 350 | |
| | | | *200 | *350 | |

Notes:

1. $\theta_{1/2}$ is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.

2. Luminous intensity/ luminous Flux: +/-15%.

* Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C

| Symbol | Parameter | Device | Typ. | Max. | Units | Test Conditions |
|-----------------------|--------------------------|--------------------|-------------|------------|-------|----------------------------|
| λ_{peak} | Peak Wavelength | Hyper Red Green | 645 515 | | nm | I _F =20mA |
| λ_D [1] | Dominant Wavelength | Hyper Red Green | 630 525 | | nm | I _F =20mA |
| $\Delta\lambda_{1/2}$ | Spectral Line Half-width | Hyper Red Green | 28 30 | | nm | I _F =20mA |
| C | Capacitance | Hyper Red Green | 35 45 | | pF | V _F =0V; f=1MHz |
| V _F [2] | Forward Voltage | Hyper Red Green | 1.95 3.3 | 2.5 4.1 | V | I _F =20mA |
| I _R | Reverse Current | Hyper Red Green | | 10 50 | uA | V _R = 5V |

Notes:

1. Wavelength: +/-1nm.

2. Forward Voltage: +/-0.1V.


3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

Absolute Maximum Ratings at TA=25°C






| Parameter | Hyper Red | Green | Units |
|--------------------------|----------------|-------|-------|
| Power dissipation | 75 | 102.5 | mW |
| DC Forward Current | 30 | 25 | mA |
| Peak Forward Current [1] | 185 | 150 | mA |
| Reverse Voltage | 5 | | V |
| Operating Temperature | -40°C To +85°C | | |
| Storage Temperature | -40°C To +85°C | | |

Note:






1. 1/10 Duty Cycle, 0.1ms Pulse Width.

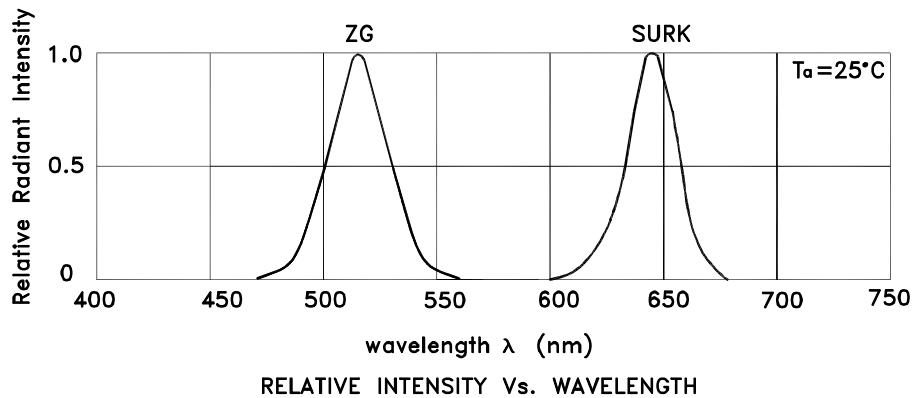

KPB-3025SURKZGC
Hyper Red

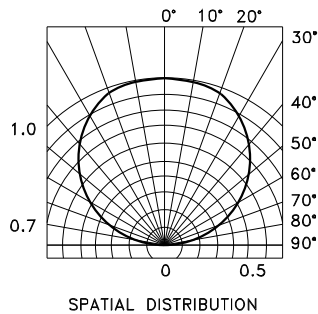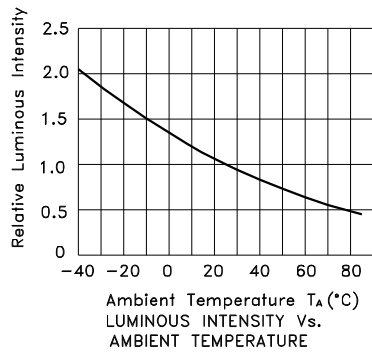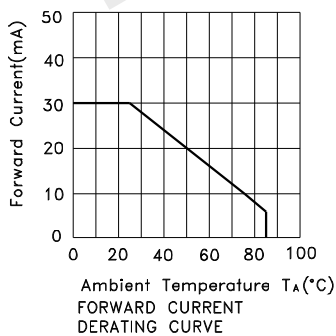


Green

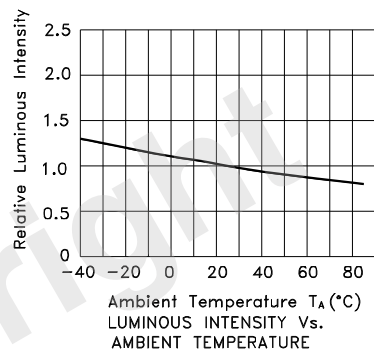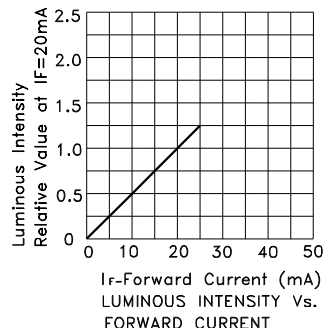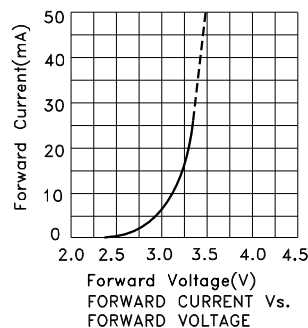

KPB-3025SURKZGC

Reflow soldering is recommended and the soldering profile is shown below.
Other soldering methods are not recommended as they might cause damage to the product.


Reflow Soldering Profile For Lead-free SMT Process.

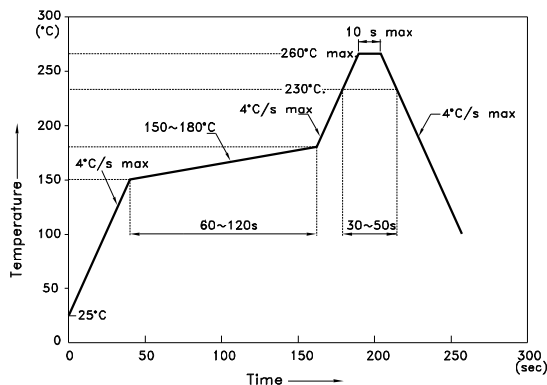


NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

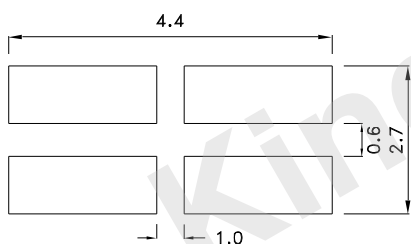

Reel Dimension

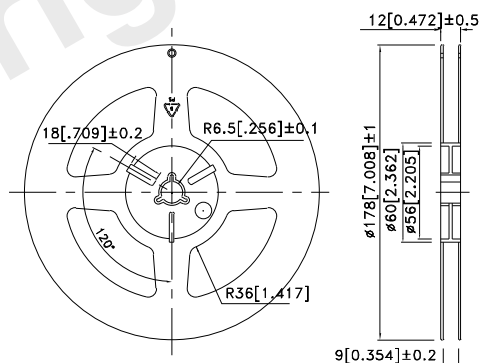



Tape Dimensions (Units : mm)

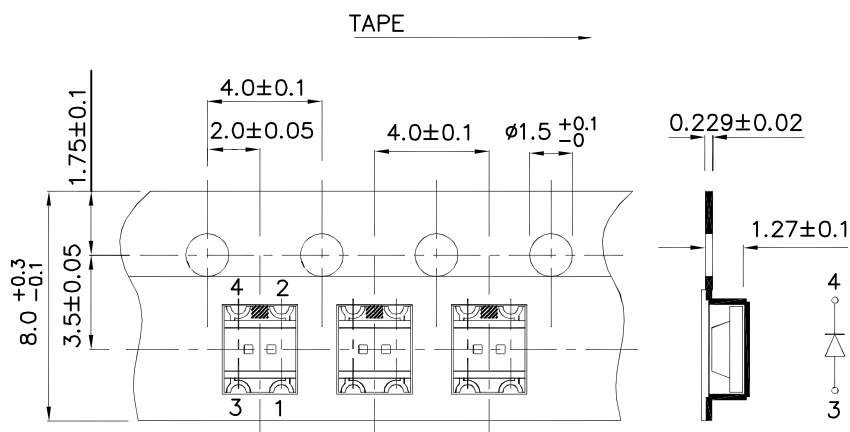

PACKING & LABEL SPECIFICATIONS

KPB-3025SURKZGC

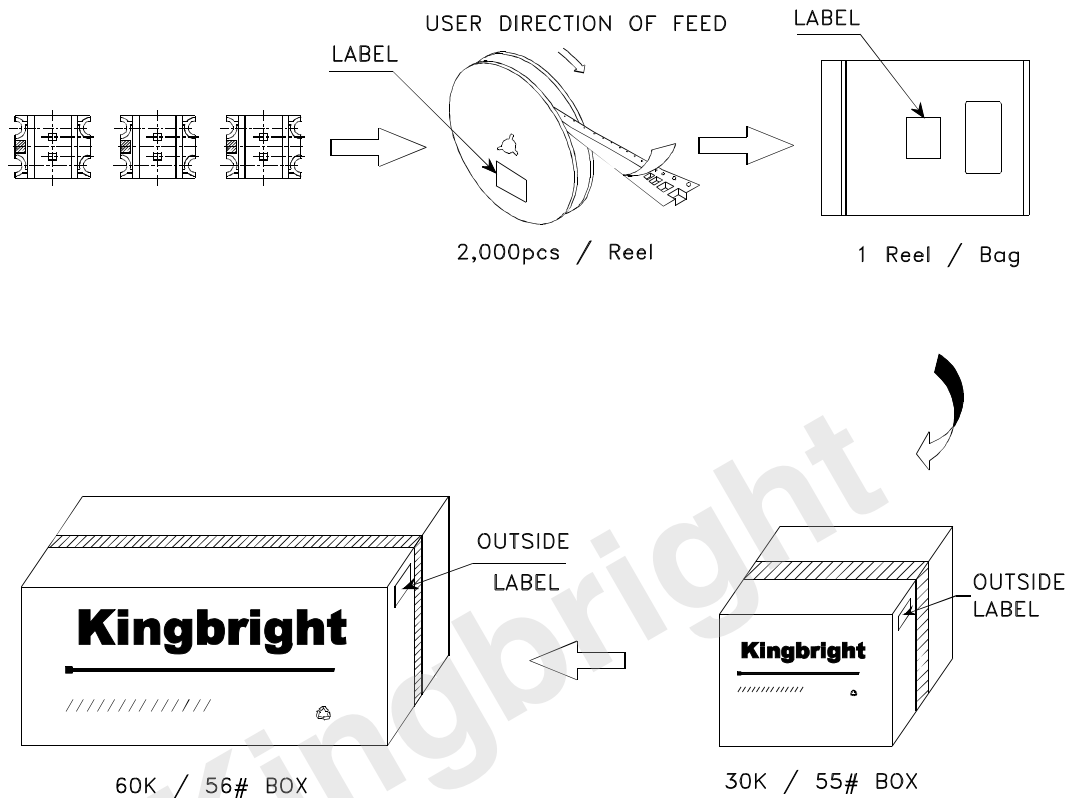

| | | |
|--|------|------------|
| Kingbright | | |
| P/NO: KPB-3025xxx | | |
| QTY: 2,000 pcs | Q.C. | Q C |
| S/N: XXXX | | XX-XX-XXXX |
| CODE: XXX | | PASSED |
| LOT NO: | | |
|  | | |
| RoHS Compliant | | |

Detailed application notes are listed on our website.
http://www.kingbright.com/application_notes